
ART.72

Belt grinding machine

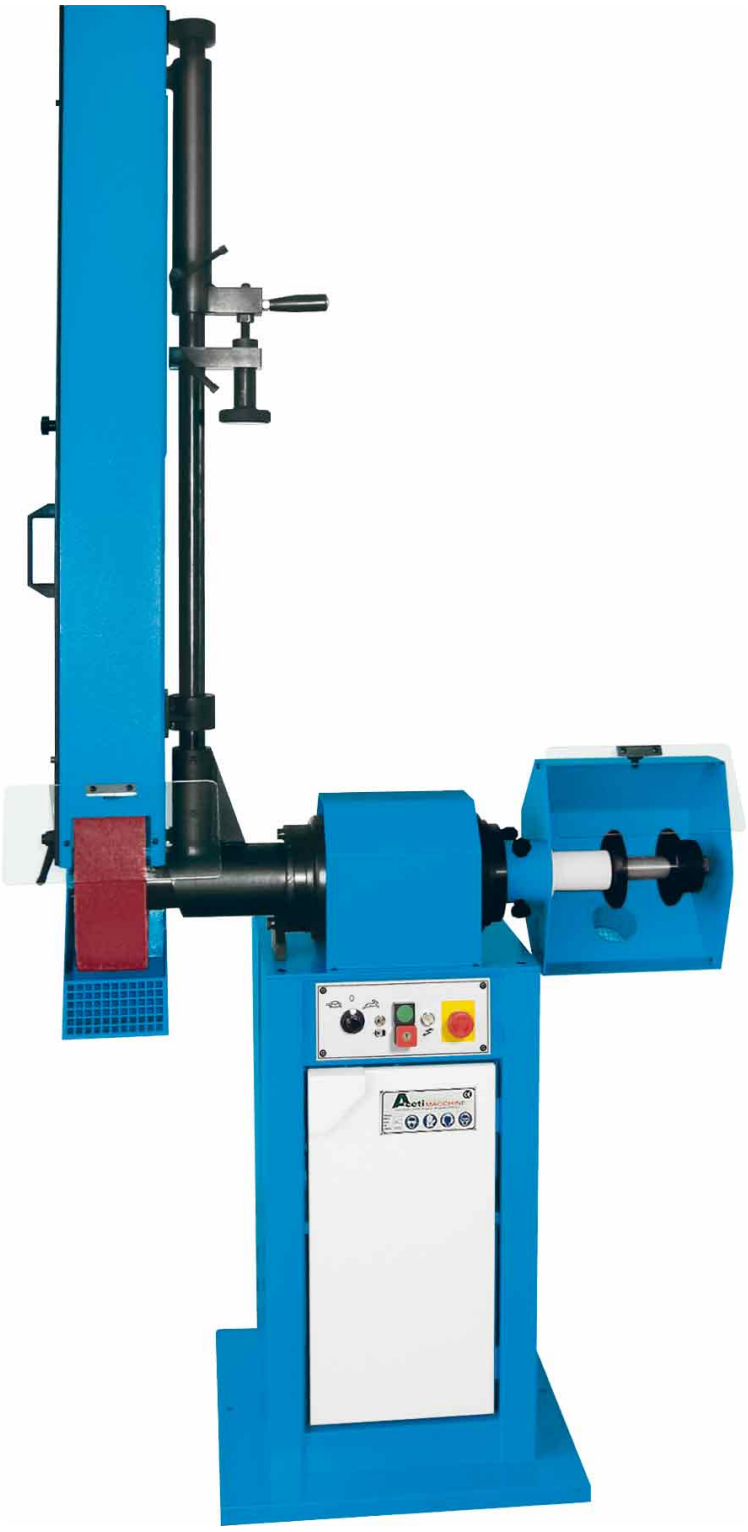

Made in Italy

Aceti Macchine s.n.c. | 24060 Bolgare (Bergamo) Italy - Via ai Dossi, 32 | P.Iva: IT01715640163
Tel. +39 035 843 751 | Fax +39 035 841 624 | info@aceti.com

ART. 72

LEVIGATRICE PROFESSIONAL ORIENTABILE A NASTRO TELESCOPICA + PULITRICE PROFESSIONAL
PROFESSIONAL TELESCOPIC ORIENTABLE BELT GRINDING + PROFESSIONAL POLISHING MACHINE
TAMK TELESCOPIQUE PROFESSIONNEL + POLISSOIR PROFESSIONNEL
TELESKOPBAND-UND POLIERMASCHINE
















Volt 400 kW 4.4

hp	Rpm	m/s	E	F	G	G1	dB	kg	A	B	OPTIONAL	Ø mm	INVERTER	ASP.01
6	1400 2800	18 36	600	1100	2200	880	70	200	2500÷3000	55	Ø250x75-100	Ø300xØ35	Rpm 0÷3000	kW 1,5

Seq. 16002 - Rel. 250621
Copyright © Aceti Macchine s.n.c. | All rights reserved

General technical info

Power supply	400 | 50 | 3	Volt|Hz|Phase
Motor power	4,4 - 3,3 (6,0 - 4,5)	kW (hp)
Motor speed	2800 - 1400	rpm
Acoustic emission	70	dB
Overall dimension (Width x Depth x Height)	1100 x 600 x H. 2200	mm
Weight standard machine	200	kg

• Belt grinder unit - wheel processing

Abrasive belt dimension (wide x length)	50 x 2500 ÷ 3000	mm
Peripheral speed	36 - 18	m/sec
Dimensions of grooved rubberized driving wheel (wide x diameter)	50 x ø 250	mm
Orientable belt grinding arm	0 ÷ 90	°

• Polisher - Buffer unit

Brush maximum external size	ø 300	mm
Motor shaft diameter	ø 35	mm
Brush maximum wide size	75	mm
Peripheral speed	44 - 22	m/sec

Copyright © Aceti Macchine s.n.c. | All rights reserved

Standard Equipments



Machine respect CE stamp of compliance
- Machine with CE conformity mark made respecting the requirements of the most recent
  directives concerning it.
- Machine complete with instruction manual complete with CE conformity certificate, test sheet and
  exploded view with relative spare parts list.
- Machine equipped with a set of service keys suitable for the adjustment and maintenance of the machine.



Guarantee of European standards
The stringent tests guarantee that all the requisites and standards necessary to obtain the guarantee in accordance with European standards are respected. Since the project we dedicate a lot of care and attention to making the machine with high quality level to deliver machines that last over time.

Base
Strong base with anti-vibration rubbers at the base and a useful shelf for tools inside.

Electrical panel
Low voltage electric controls with padlock device integrated in the main electric switch.

Electronic brake card
Emergency stop with electronic motor braking with safety anti-reset function.

Motor
Motor 2 speeds

Seq. 16002 - Rel. 250621
Copyright © Aceti Macchine s.n.c. | All rights reserved

Orientable telescopic arm sander
Orientable telescopic arm sander adjustable from 0 ° to 90 ° and intermediate positions.

Telescopic arm
Arm telescopic machine that allows to mount tapes from development 2500 mm up to 3000 mm.

Rubberized grooved wheel
Rubberized grooved wheel d.250x50 mounts on machine

Widths abrasive belts
Three possible web widths by replacing the rubber wheel: 50mm - 75mm - 100mm.

Abrasive belt
Abrasive belt mounted on the machine ready for use.

Belt grinder cover
Carter sander with predisposition connection system.

Copyright © Aceti Macchine s.n.c. | All rights reserved

Polishing cover
Carter adjustable for a comfortable and precise positioning of the operator and with predisposition connection system.

Locking accessories
Locking and reducing steel flange for brush, flap wheel with spacers and clamping nuts.

Anti-spark repair
Transparent protection arrester with friction joint.

Seq. 16002 - Rel. 250621
Copyright © Aceti Macchine s.n.c. | All rights reserved

Technical modification

This product data sheet does not constitute a contractual obligation.
We reserve the right to modify and/or improve our machines without prior notice.
Some photographs and illustrations are purely demonstrative and may differ from the real ones.

Copyright © Aceti Macchine s.n.c. | All rights reserved